



The EPA states: that bellows seals are "the best available technology" to control fugitive emissions.

Our bellows technology also keeps any corrosive or harmful atmospheric condition from entering the process.

**Forged Steel Globe Valves
1/2" - 2" Welded Bonnet**


- **Stainless Steel Bellows**
For long life and good corrosion resistance
- **Zero Stem Leakage**
Eliminates media loss and satisfies environmental regulations
- **Zero Maintenance**
Lower operating costs/no downtime
- **Reduce Monitoring Costs**
- **Three Stem Seals For Safety**
*Metallic bellows
Graphite packing
Backseat in open position*
- **Hardfaced Seating Surface**
Stellite 6 for long life
- **Valve Designed, Manufactured And Tested To ANSI B16.34/API 598**
- **Additional Alloy And Trims Available**
- **For Applications Where Leakage Into Or Out Of The Valve Is Unacceptable**
*Heat Transfer Oil
Toxic Fluids
Steam
Regulated Media*



Materials

No.	Part	Carbon Steel (C22)
1	Body	A105*
2	Bonnet	A105
3	Extension	A105
4	Disc	Type 420 SS
5	Bellows Assy.	Type 321 SS
6	Stem	Type 410 SS
7	Guide Pin	Carbon Steel
8	Gland Packing	Graphite
9	Gland Bushing	Type 410 SS
10	Gland Plate	Carbon Steel
11	Gland Bolt	Type 410 SS
12	Pin	Type 410 SS
13	Hex Nut	Carbon Steel
14	Yoke Sleeve	Type 410 SS
15	Thrust Collar	Type 410 SS
16	Handwheel	Malleable Iron
17	Handle Nut	Carbon Steel
18	Grease Fitting	Copper Alloy
19	Name Plate	Aluminum

**Forged Steel Globe Valves 1/2" - 2"
Welded Bonnet**

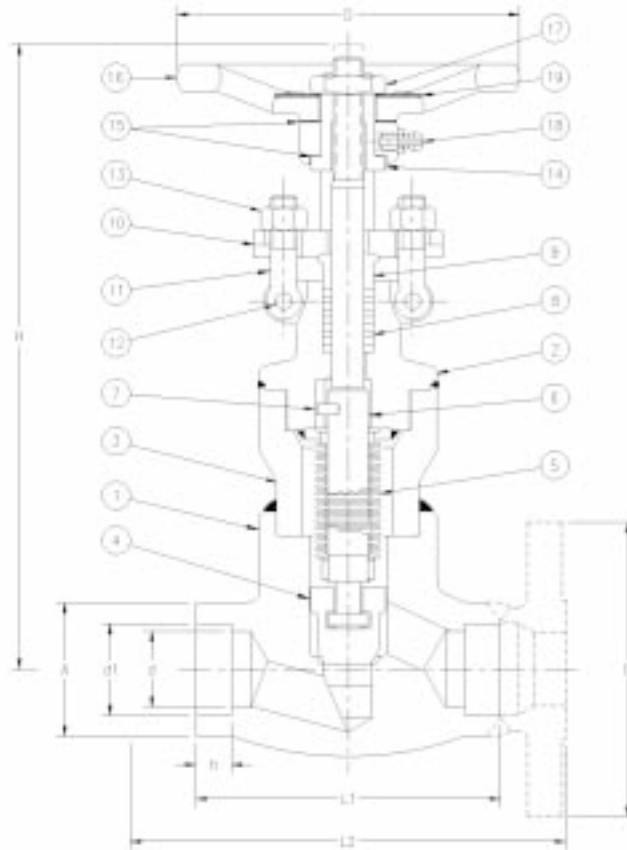

*Stellite overlay on seating area. Stellite is a registered trademark of Thermadyne.

Operating Characteristics and Dimensions

Socket Weld/Threaded Globe Valves

SIZE	d	A	d1	h	L1	H	D	LIFT	WT(ibs.)	Cv
1/2	.63	1.34	.855	.39	3.11	8.7	3.94	.26	6.5	2.7
3/4	.87	1.57	1.065	.51	3.62	8.7	3.94	.26	7	3.1
1	1.10	1.93	1.330	.51	4.37	9.6	4.92	.26	10.4	5.4
1 1/2	1.65	2.56	1.915	.51	5.98	12.6	6.30	.43	20.7	13.4
2	2.05	3.07	2.406	.63	6.77	13.6	7.09	.49	29.4	23.0

Flanged Globe Valves

SIZE	150			300			600		
	L2	C	WT(ibs.)	L2	C	WT(ibs.)	L2	C	WT(ibs.)
1/2	4.25	3.50	8.5	6.00	3.75	10.5	6.50	3.75	10.5
3/4	4.62	3.88	10	7.00	4.62	14	7.50	4.62	15
1	5.00	4.25	18	8.00	4.88	22	8.50	4.88	23
1 1/2	6.50	5.00	22	9.00	6.12	30	9.50	6.12	31
2	8.00	6.00	41	10.50	6.50	49	11.50	6.50	51



**5 Year/10,000 Cycle
Bellows Fatigue Warranty**

EAGLE AMERICA, INC.
Valves For The Future

33 Plan Way - Building 5
Warwick, RI 02886

Sales: (401) 732-0333

Fax: (401) 732-2201

Toll Free: (800) 314-9246

<http://www.eagle-america.net>